


FLEX LITE

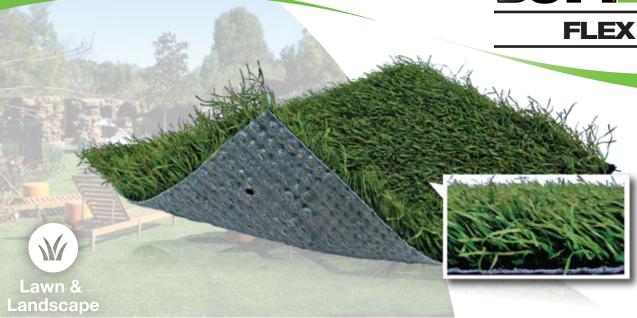

PROPERTY

Primary Yarn Polymer

Yarn Cross Section

Standard Colors

UV Stabilized

Fabric Construction

Primary Backing

Coating Type(s)

Perforations

Recommended Infill

Pile Height

Total Weight

ISO 9001 Quality Assured

Roll Width

DESCRIPTION

Polyethylene

Polyethylene Monofilament/ Texturized Polyethylene

Field/Olive

Yes

Tufted

Dual Layered Woven Polypropylene

SilverBack™ Polyurethane

Yes

2 - 3 lbs of Silica Sand or Envirofill

1 1/2"

36 oz.

Yes

15 Ft.

ADVANTAGES

- Requires no water
- Virtually maintenance-free
- Fresh cut appearance
- Needs no chemicals or fertilizer
- · Never needs mowing or insecticides
- Clean and can be cleaned Unlike mulch and shredded rubber
- ADA/ABA compliant Crutches won't sink in and wheelchairs roll
- Safety No more buried glass or other harmful objects
- Lead Free
- Provides excellent drainage
- Recyclable components
- Does not support stain or odor causing bacteria, mold or mildew





SOFT AWA

FLEX LITE

BENEFITS

SoftLawn® Flex Lite is one of our newest offerings featuring a brand new yarn, the Messy. This yarn is durable enough to stand up to traffic, and at a 1 1/2" it will be great in a landscape setting. The stalk yarn is a two color Field/Olive blend. This product does not have a thatch layer. The Silverback™ Polyurethane backing provides excellent drainage.

PRESSURE TREATED 2X4 ANCHOR TO CONCRETE CURB W/ 1/2"Ø STAINLESS STEEL EXPANSION ANCHORS SLOPE SUBGRADE @ .5% TOWARDS COLLECTOR TRENCH GEOTEXTILE FABRIC, COVER ENTIRE SUBGRADE RESILIENT SURFACING PANEL DRAIN INFILLED SYNTHETIC
TURF SYSTEM 2" DEPTH 1/4"-3/8" CLEAN AGGREGATE 4" DEPTH 3/4" TURF AGGREGATE 6" X 12" CONC. CURB W/ TWO #4 REBAR 9" PERFORATED COLLECTOR SUB-DRAIN COMPACTED SUBGRADE **CURB** MATERIAL VARIES, SEE PLAN 6" X 8" CEDAR OR P.T. TIMBER

3/4" CHAMFER BOTH SIDES

SLOPE

NAILER BOARD

It is the policy of Synthetic Turf International to continuously improve their line of products. Therefore, Synthetic Turf International reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser. These are standard specifications subject to manufacturing tolerances and consumer requests.











(1/2" REVEAL) WITH GALV. STEEL

SCREWS AT 12" O.C

SYNTHETIC TURF SYSTEM FREE DRAINING FINISHING STONE, LASER GRADE ONLY FREE DRAINING BASE STONE

2" X 3" SHELF FOR TIMBER ATTACH

TURF BACKING TO TIMBER W/ S.S